

APOLLO COLLECTION


Handmade using state-of-the-art techniques —
a door that is both form & function, built to last.

APOLLO COLLECTION


A modern — customizable — aluminum full view door, built to last.

STANDARD DESIGNS


Go with a classic, or create your own. Ultra wide single panel, short square panel, asymmetric layout — you name it, just ask.




2 Panel Wide
8ft–9ft



3 Panel Wide
9ft–12ft

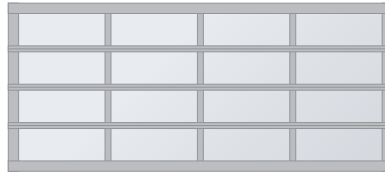


4 Panel Wide
12ft–16ft

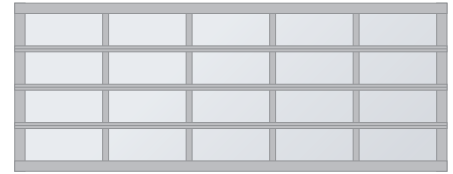

5 Panel Wide
16ft–18ft

GLASS OPTIONS

Single-pane 1/8" tempered is standard, or 3/16" on wide panels. Double-pane 1/2" insulated and low-e optional. Special requests welcome.

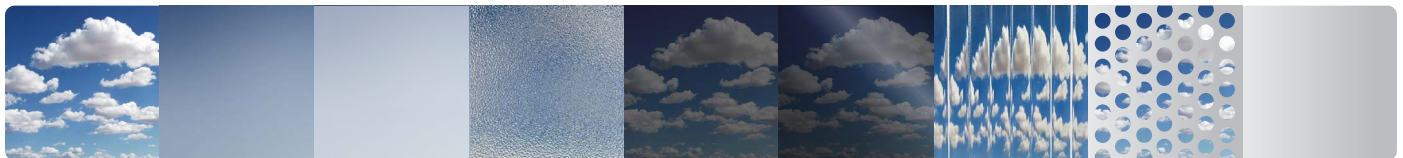

Clear
Insulated option

Satin Etch
Insulated option

White
7/32" Laminate

Obscure
Insulated option

Gray Lite II
Insulated option

Mirrorpane
Insulated option

Custom
Special request

Perforated
1/16"–1/2" holes

Solid
Insulated option

COLOR OPTIONS


Embrace the smooth aluminum with a satin-like anodized finish, or powder coat to match your project with custom RAL colors.



Clear
Anodized



Black
Anodized



Dark Bronze
Powder Coat*



Custom RAL
Powder Coat*

* Longer lead time applies

INSULATION

When configured with an insulated frame and insulated glass, the Apollo Collection can achieve high performing R-values.*

CONFIGURATION	8 x 7	18 x 8
1/2" Solarban 70 Insulated (90% argon-filled)	5.2	5.0
1/2" Low E Coated Insulated (air-filled)	4.5	4.2
1/2" Insulated (air-filled)	3.8	3.4

*R-values are calculated

LIFETIME WARRANTY



The Apollo Collection offers a limited lifetime warranty on the aluminum, up to 5 years on frame finish, 3 years on springs, and a one-year limited warranty on glass panels & hardware. See full text of warranty for details, just ask.



TECHNICAL SPECIFICATIONS: Commercial-grade 2" thick 6063-T5 aluminum frame. Max width: 24' 2", height: 18' 1", 240 sq. ft. or 100lbs. per roller. Maximum panel size: 10 sq.ft. End stile, top & bottom rail: 5". Meeting rails: 3", combined. Center stile: 2.5". Bevel on panel edge: 1/2". Heavy-duty galvanized hardware, 2" or 3" track based on weight, angle struts provided on doors over 12' wide, and 10,000 cycle springs standard.